


Closed1346+5	Stroke3058
--------------	------------

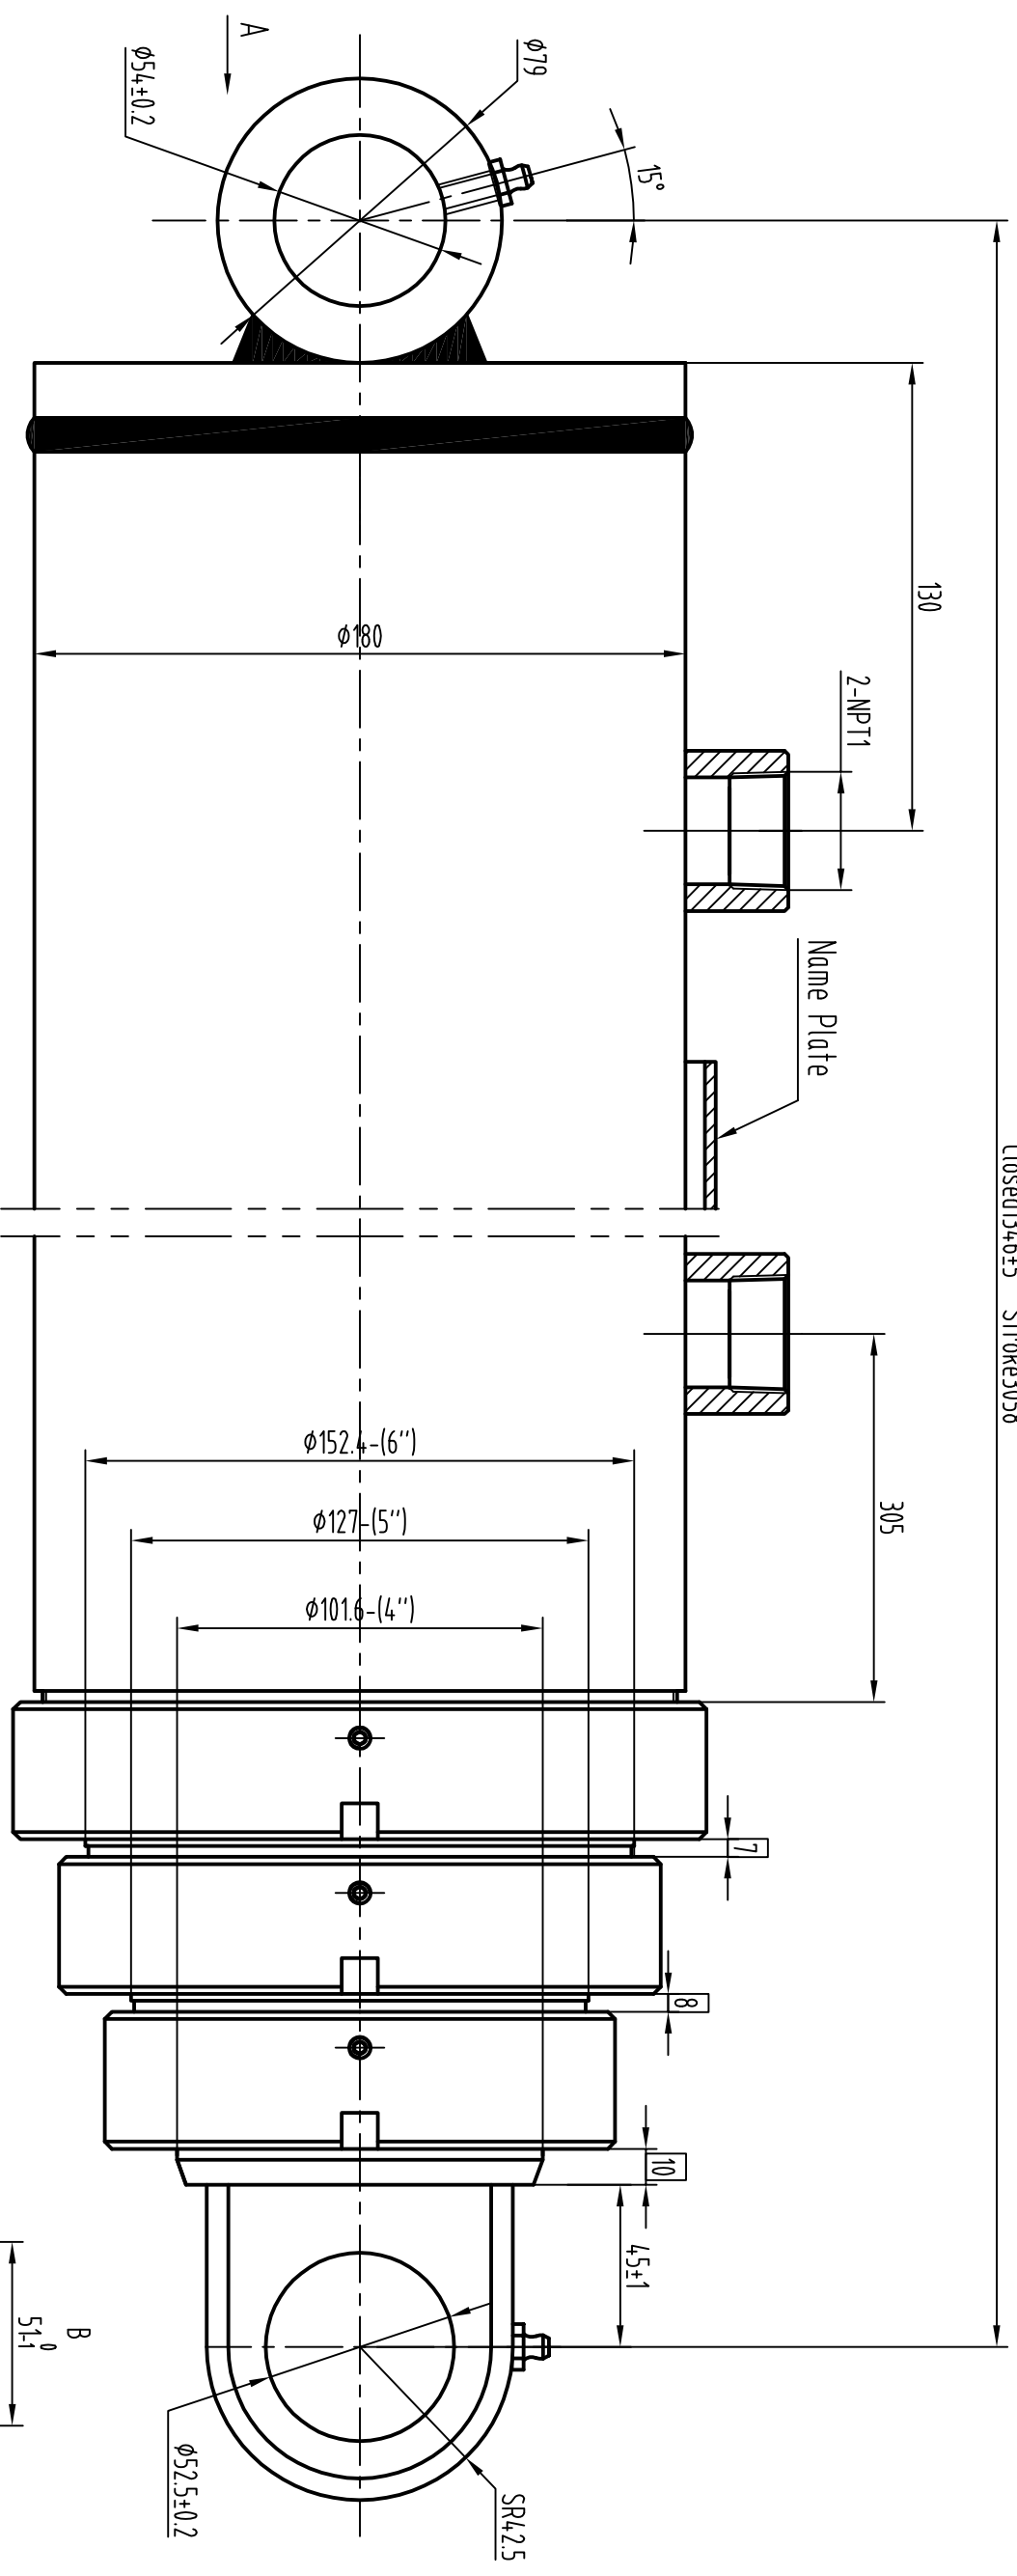


instruction:

1. maximum pressure: 2500psi

2. after the test, Non mating surface should be painted in color. even painting, no dropping, no sagging.

3.0 Others accomplish according to the standard

QC/T460-2010<<cylinder for dump truck technology>>

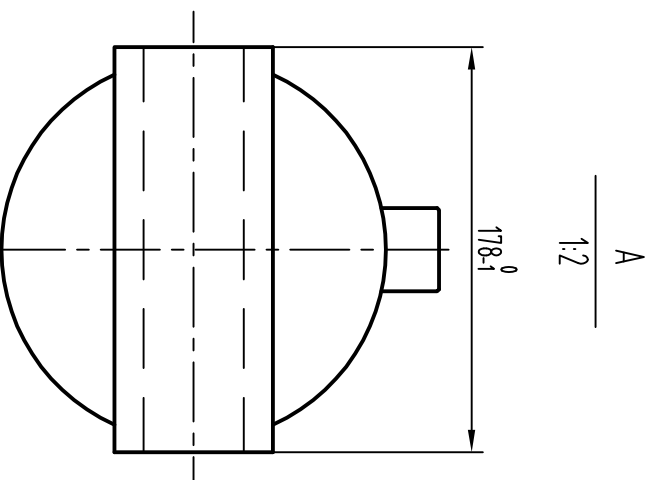

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <h1 style="margin: 0;">AKP63-120-A</h1> <h2 style="margin: 0;">(AK63-4402-120)</h2> </div> <div style="text-align: right;"> <p style="margin: 0;">by Rockmac</p> </div> </div>									
Mark	Number	Serial	Change	file No.	Signature	Date	<div style="display: flex; justify-content: space-between;"> <div>Phase mark</div> <div>Weight</div> <div>scale</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div>Sheet</div> <div>OF</div> </div>		
Designed				Standard			<div style="text-align: center;"> <h3 style="margin: 0;">Single acting telescopic cylinder</h3> <h3 style="margin: 0;">3TG-E152.4x3058PK/A</h3> </div>		
Drawn									
Checked									
Craft				Approved					